



Test Report issued under the responsibility of:



**TEST REPORT
IEC 62133-2**

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems

Report Number..... : CN23KTRR 001

Date of issue..... : 2024-03-28

Total number of pages : 28 pages

Name of Testing Laboratory preparing the Report : TÜV Rheinland (Shenzhen) Co., Ltd.

Applicant's name : Hamedata Technology Co., Limited

Address..... : 1-3F & 6-8F, BLDG#A, Changfang Industrial Park, No.2 Guihua 5th, Road, Pingshan District, Shenzhen, 518118 Guangdong, P.R. China

Test specification:

Standard : IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

Test procedure : CB Scheme

Non-standard test method : N/A

TRF template used..... : IECEE OD-2020-F1:2021, Ed.1.4

Test Report Form No. : IEC62133_2C

Test Report Form(s) Originator : DEKRA Certification B.V.

Master TRF : Dated 2022-07-01

Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description :	Li-ion battery	
Trade Mark(s)	N/A	
Manufacturer	Same as applicant	
Model/Type reference	B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS	
Ratings	44.8V, 50Ah, 2240Wh	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.
Testing location/ address :	1F East & 3F West -4F, Cybio Technology Building No.1, No.16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, 518057, Shenzhen, China	
Tested by (name, function, signature) :	Revan Dai (Engineer)	<i>Revan Dai</i>
Approved by (name, function, signature) ... :	Molly Meng (Reviewer)	<i>Molly Meng</i>
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
Testing location/ address :		
Tested by (name, function, signature) :		
Approved by (name, function, signature) ... :		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
Testing location/ address :		
Tested by (name + signature)		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) ... :		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
Testing location/ address :		
Tested by (name, function, signature) :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) ... :		
Supervised by (name, function, signature) :		

<p>List of Attachments (including a total number of pages in each attachment):</p> <p>-Attachment 1: National Difference (3 pages). -Attachment 2: Photo documentation (8 pages).</p>	
<p>Summary of testing:</p>	
<p>Tests performed (name of test and test clause):</p> <p>cl.5.2 Insulation and wiring; cl.5.6.2 Design recommendation; cl.7.1 Charging procedure for test purposes; cl.7.2.2 Case stress at high ambient temperature (batteries); cl.7.3.2 External short circuit (batteries); cl.7.3.3 Free fall; cl.7.3.6 Over-charging of battery; cl.7.3.8.1 Vibration; cl.7.3.8.2 Mechanical shock; cl.8.2 Small cell and battery safety information</p> <p>The component cell (Model: FP13D6263) inside battery had CB approval by TÜV Rheinland according to IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 (Certificate No.: JPTUV-142861, Report No. CN22BS9M 001).</p> <p>Tests are made with the number of batteries specified in IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 Table 1.</p>	<p>Testing location:</p> <p>TÜV Rheinland (Shenzhen) Co., Ltd. 1F East & 3F West -4F, Cybio Technology Building No.1, No.16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, 518057, Shenzhen, China</p>
<p>Summary of compliance with National Differences (List of countries addressed):</p> <p>KR</p> <p>KR=Republic of Korea</p> <p><input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN 62133-2:2017, EN 62133-2:2017/A1:2021.</u></p>	

Use of uncertainty of measurement for decisions on conformity (decision rule) :

No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:


The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.


Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

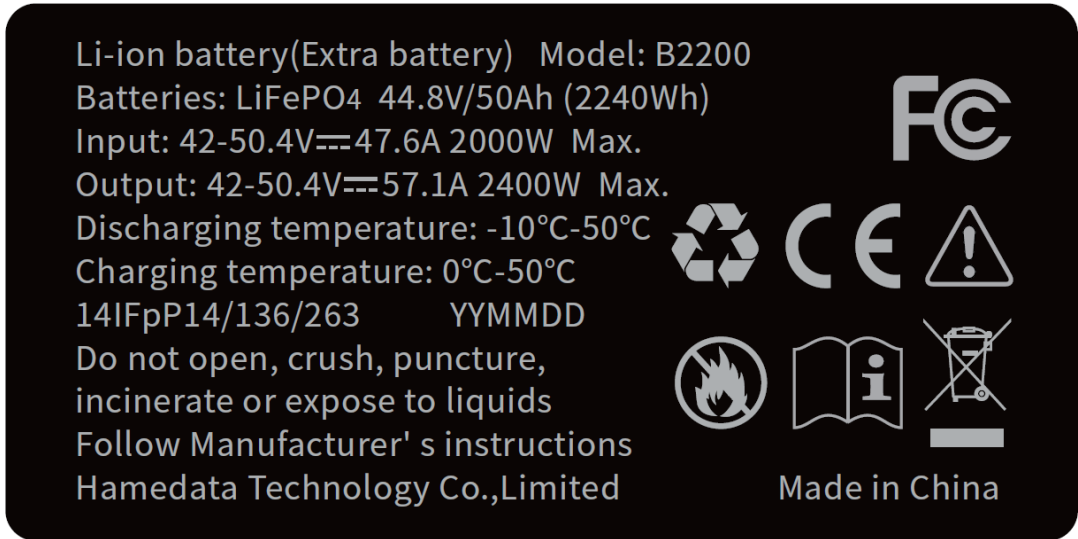

Label for B2200

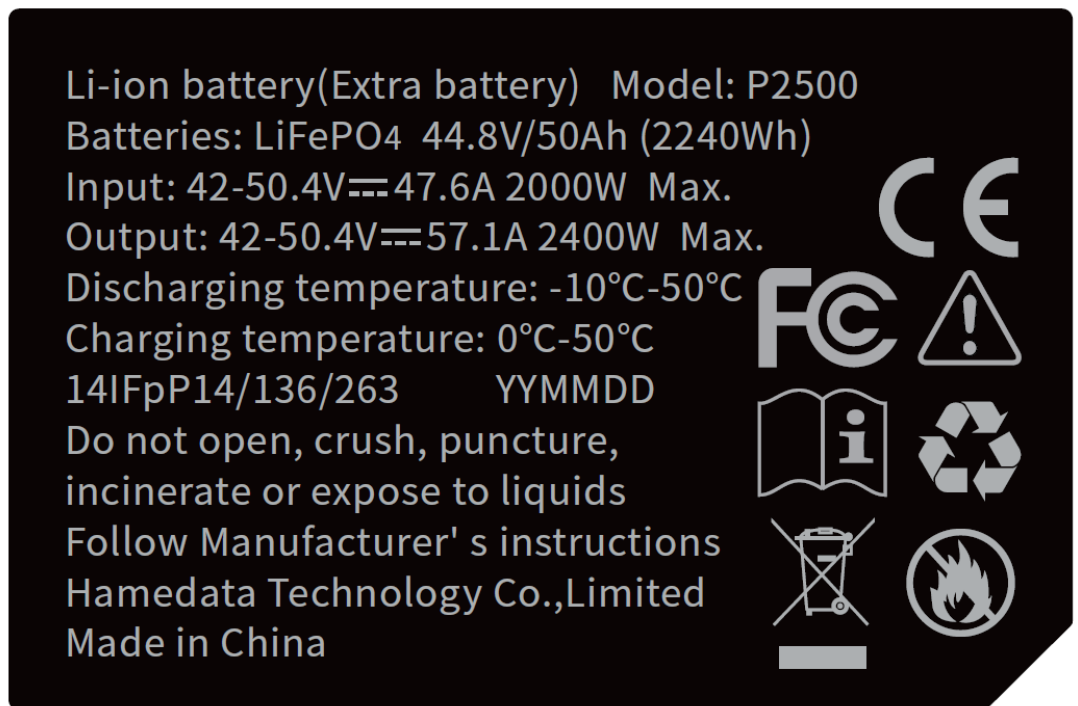

Label for P2500

Remark: This “YMMDD” represents the manufacture date of the product, “YY” means year, “MM” means month, “DD” means day.

The two labels are identical except for the model name.

Test item particulars.....:	
Classification of installation and use.....:	N/A
Supply Connection	DC Connector
Recommend charging method declared by the manufacturer	Charging the battery with 35A constant current and 50.4V constant voltage until the current reduces to 500mA at ambient 20°C±5°C
Discharge current (0,2 It A)	10A
Specified final voltage.....:	39.2V
Upper limit charging voltage per cell.....:	3.8V
Maximum charging current	50A
Charging temperature upper limit	55°C
Charging temperature lower limit.....:	0°C
Polymer cell electrolyte type.....:	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
Possible test case verdicts:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
Testing.....:	
Date of receipt of test item	2024-01-19
Date (s) of performance of tests	2024-01-19 to 2024-03-06
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : Same as applicant	

General product information and other remarks:

This battery is constructed with fourteen lithium-ion cells (14S1P), and has overcharge, over-discharge, over current and short-circuits proof circuit.

The component cell (Model: FP13D6263) inside battery had CB approval by TÜV Rheinland according to IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 (Certificate No.: JPTUV-142861, Report No. CN22BS9M 001).

The battery is used for portable applications only.


B2200 and P2500 are identical except for differences in appearance, size and output connector, after evaluation, additional mechanical tests were performed on P2500.

P2500 and P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS are identical except for model name, after evaluation, no further testing considered as necessary.


The main features of the battery are shown as below (clause 7.1.1):

Model	Rated capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Specified final voltage
B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS	50Ah	44.8V	35A	50A	50A	57.1A	50.4V	39.2V

Construction:

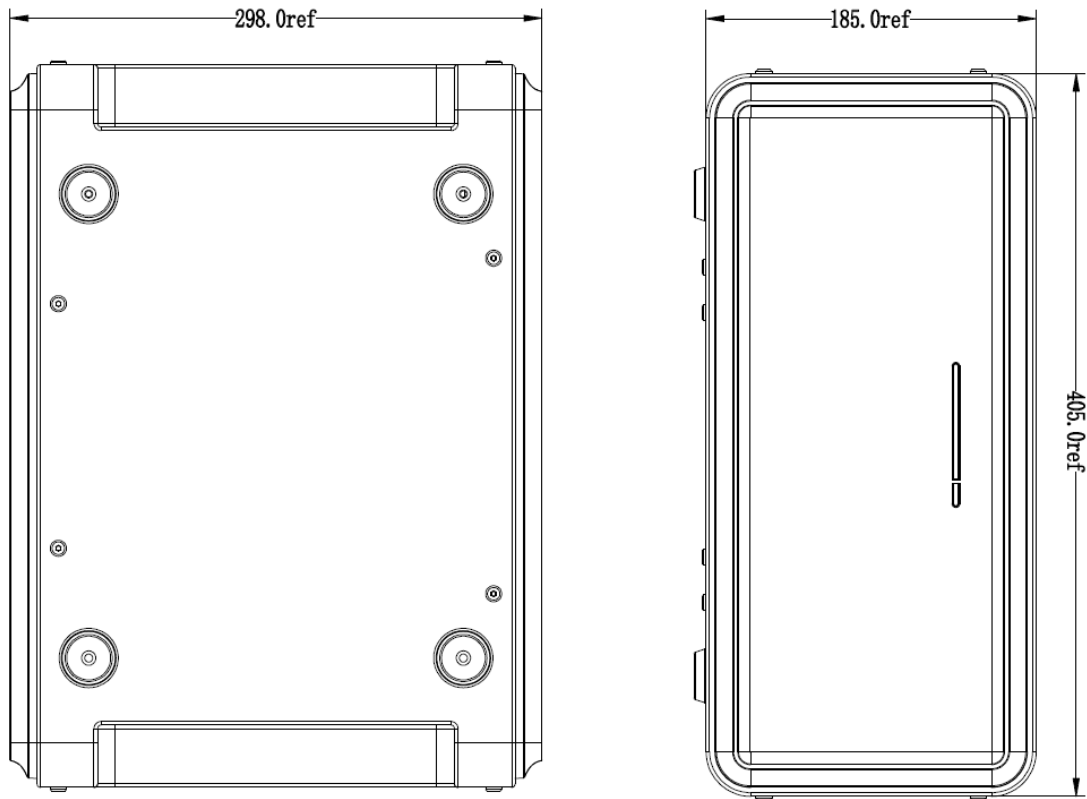


Construction of B2200

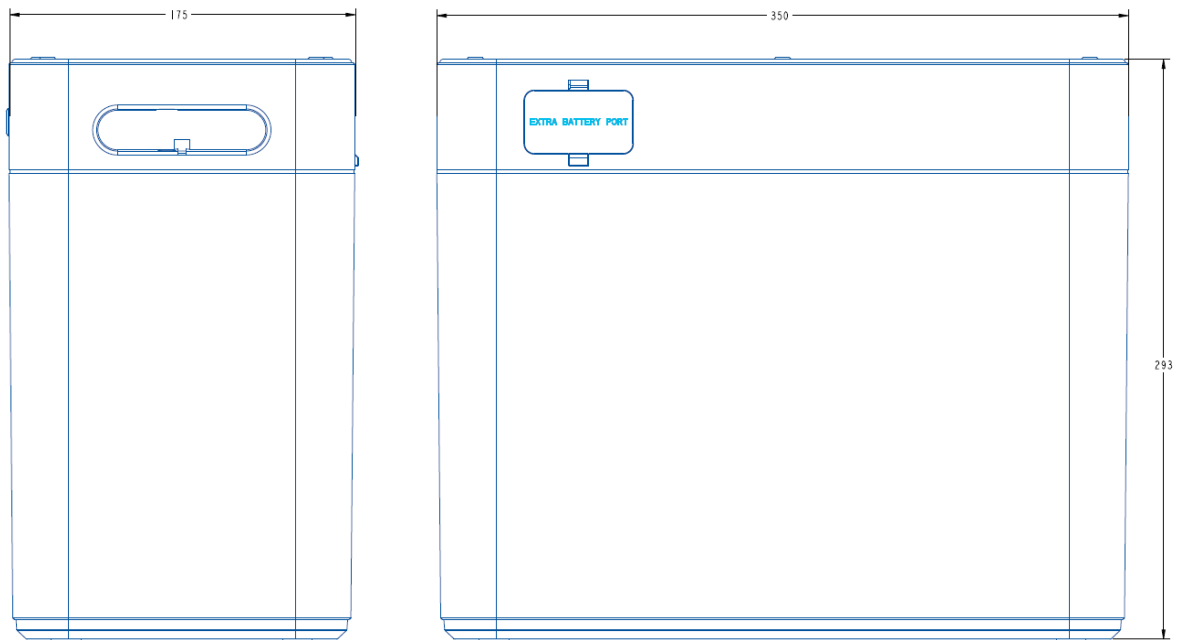


Construction of P2500

Battery (unit: mm)

Circuit diagram:

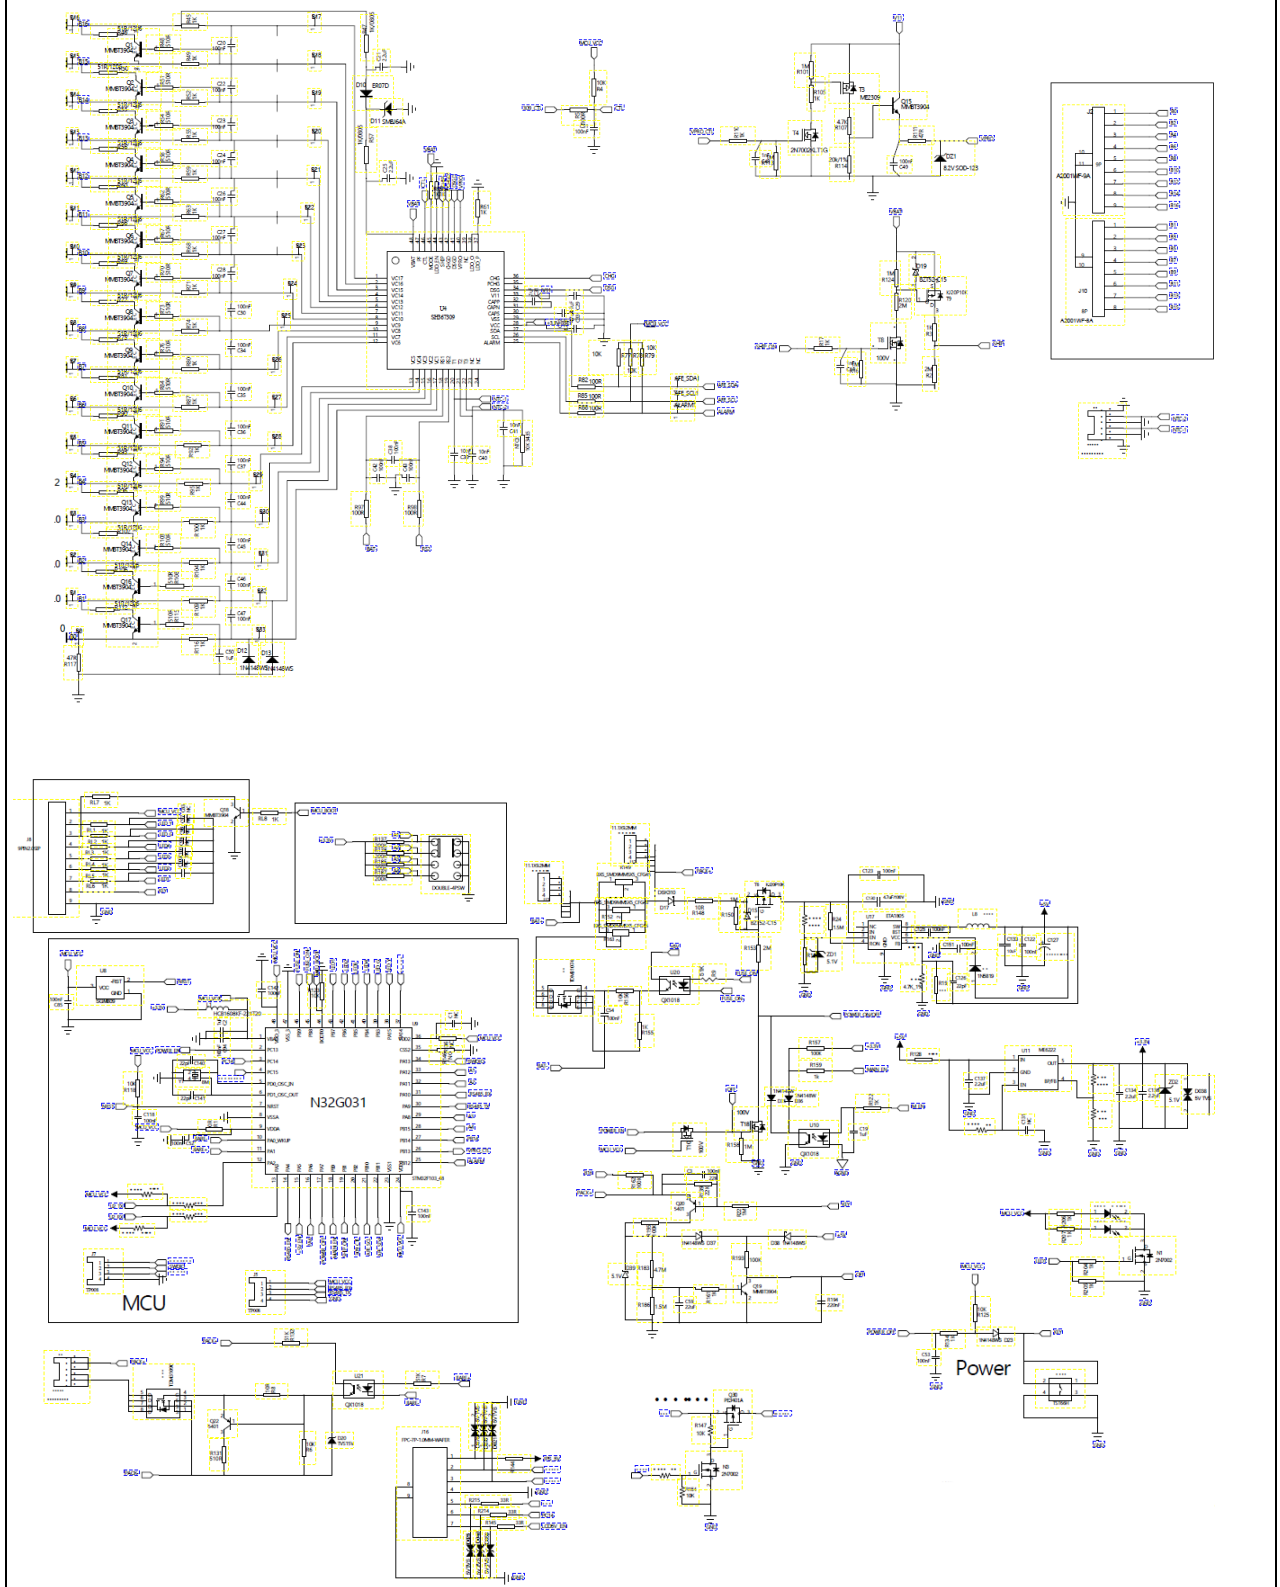

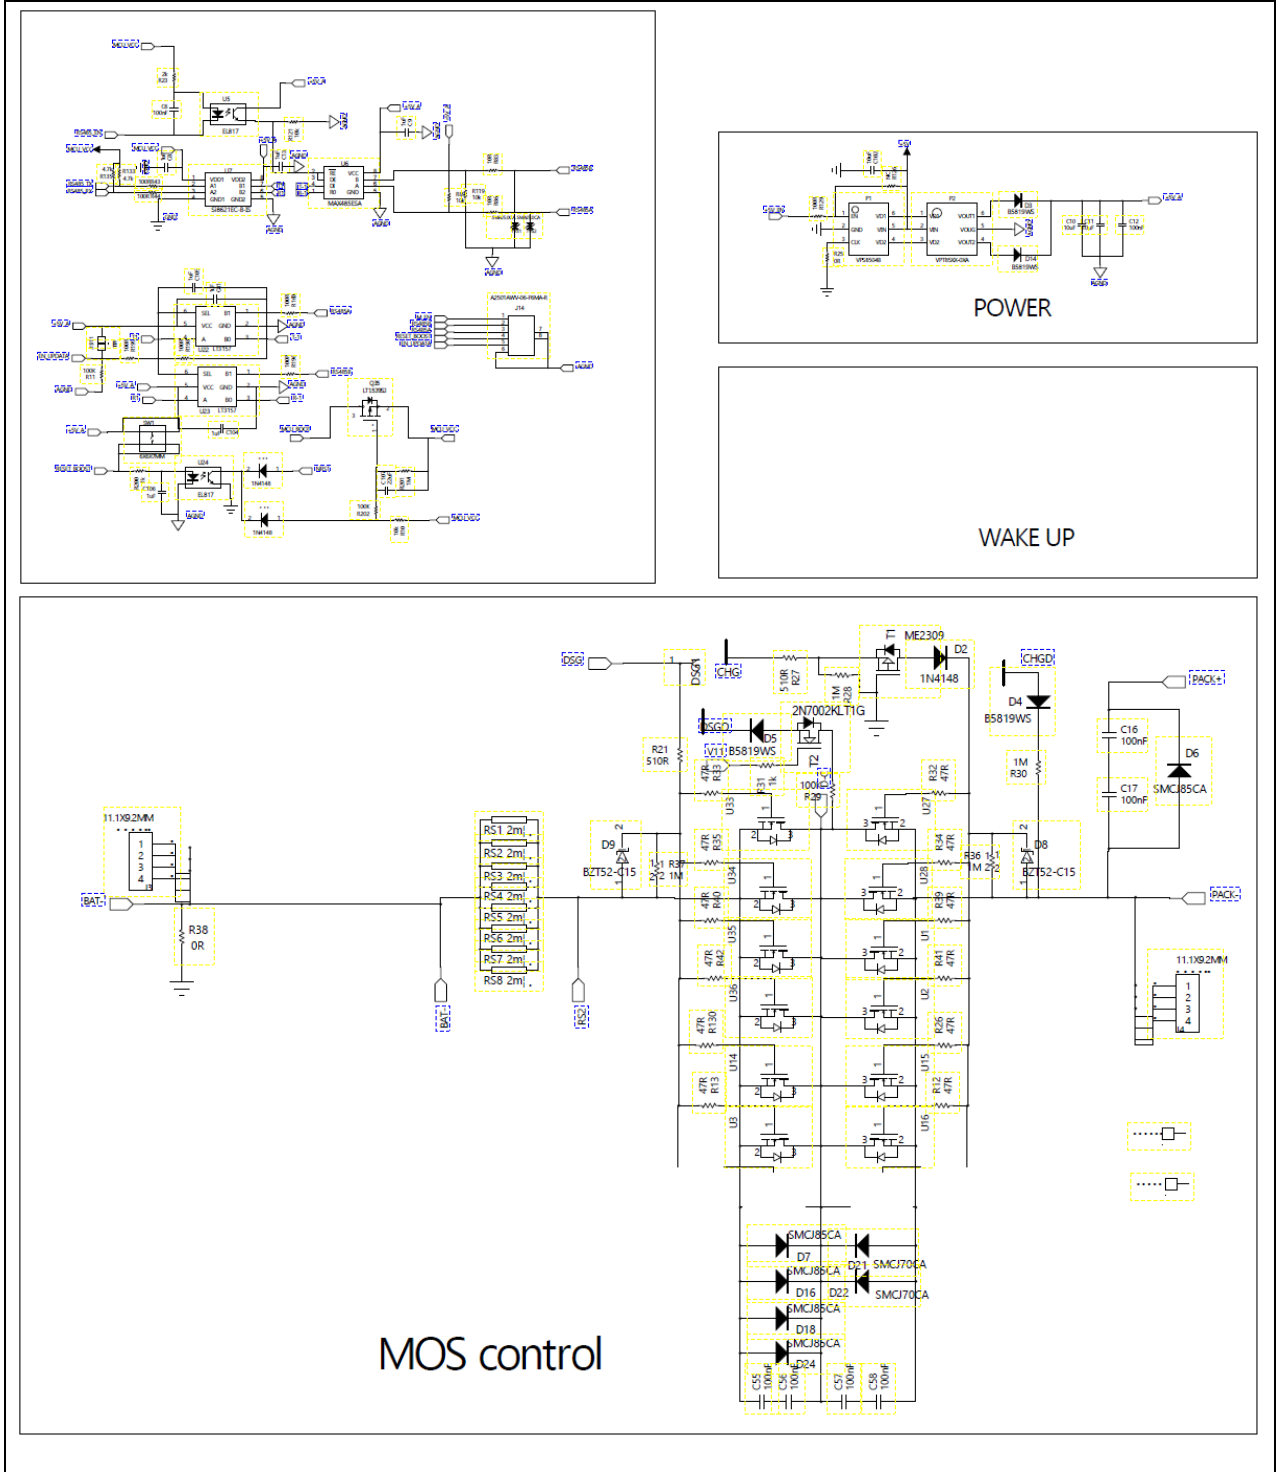

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
4	PARAMETER MEASUREMENT TOLERANCES		P
	Parameter measurement tolerances		P
5	GENERAL SAFETY CONSIDERATIONS		P
5.1	General		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ		P
	Insulation resistance (MΩ) :	>1000	—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearances and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on the long side of pouch cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		P
5.4	Temperature, voltage and current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 7.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits are specified in the manufacturer's specifications.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
5.5	Terminal contacts		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC Connector complied with the requirements.	P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	General		P
	Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region	Protective circuit equipped on battery.	P
	This protection may be provided external to the battery such as within the charger or the end devices		N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly	Current, voltage and temperature specified by cell manufacturer.	P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components are added as appropriate and consideration given to the end-device application		N/A
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance	Safety analysis report provided by manufacturer.	P
5.6.2	Design recommendation		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks	14S1P Charging per cell voltage: 3.6V, not exceed 3.8V specified in Table 2.	P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		P
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection		P
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		P
	It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage	Final voltage of battery: 39.2V, not exceed the final voltage specified by cell manufacturer.	P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system		P
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse	Mechanical protection for cell connections and control circuit provided.	P
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product	The mechanical protection can be provided by the battery case.	P
	The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests		N/A
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Complied. ISO 9001: 2015 certificate provided.	P
5.8	Battery safety components	See TABLE: critical components information	P
6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 Ω are tested in accordance with Table 1	Not coin cells	N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C \pm 5 °C		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection		P
	When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test	See clause 7.3.2	P
7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	Charging procedure for test purposes		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C \pm 5 °C, using the method declared by the manufacturer	See page 6.	P
	Prior to charging, the battery has been discharged at 20 °C \pm 5 °C at a constant current of 0,2 It A down to a specified final voltage	See page 6.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
7.1.2	Second procedure	CB approval cell used.	N/A
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		N/A
	After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method		N/A
7.2	Intended use		P
7.2.1	Continuous charging at constant voltage (cells)	CB approval cell used.	N/A
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer		N/A
	Results: no fire, no explosion, no leakage.....: (See appended table 7.2.1)		N/A
7.2.2	Case stress at high ambient temperature (battery)	Tested complied.	P
	Oven temperature (°C).....: 70		—
	Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells	No physical distortion of the battery case resulting in exposure of internal protective components and cells.	P
7.3	Reasonably foreseeable misuse		P
7.3.1	External short-circuit (cell)	CB approval cell used.	N/A
	The cells were tested until one of the following occurred:		N/A
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	Results: no fire, no explosion.....: (See appended table 7.3.1)		N/A
7.3.2	External short-circuit (battery)	Tested complied.	P
	The batteries were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test	Single fault conducted on three samples.	P
	A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor	Single fault applies on MOSFET U33 (pin 2 - pin 3), MOSFET Q23 (pin S - pin D), MOSFET T5 (pin S - pin D).	P
	Results: no fire, no explosion..... :	(See appended table 7.3.2)	P
7.3.3	Free fall	Tested complied.	P
	Results: no fire, no explosion	No fire. No explosion.	P
7.3.4	Thermal abuse (cells)	CB approval cell used.	N/A
	Oven temperature (°C)..... :	N/A	—
	Results: no fire, no explosion		N/A
7.3.5	Crush (cells)	CB approval cell used.	N/A
	The crushing force was released upon:		N/A
	- The maximum force of 13 kN ± 0,78 kN has been applied; or		N/A
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: no fire, no explosion..... :	(See appended table 7.3.5)	N/A
7.3.6	Over-charging of battery	Tested complied.	P
	The supply voltage which is:		P
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or		N/A
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and	63.84V applied.	P
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		P
	- Returned to ambient		N/A
	Results: no fire, no explosion..... :	(See appended table 7.3.6)	P
7.3.7	Forced discharge (cells)	CB approval cell used.	N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer		N/A
	The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage		N/A
	- The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	- The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration		N/A
	Results: no fire, no explosion..... :	(See appended table 7.3.7)	N/A
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration		P
	Results: no fire, no explosion, no rupture, no leakage or venting. :	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock		P
	Results: no leakage, no venting, no rupture, no explosion and no fire :	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)	CB approval cell used.	N/A
	The cells complied with national requirement for :	France, Japan, Korea, Switzerland.	—
	The pressing was stopped upon:		N/A
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached		N/A
	Results: no fire..... :	(See appended table 7.3.9)	N/A
8	INFORMATION FOR SAFETY		P
8.1	General		P
	Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products	Information for safety mentioned in manufacturer's specifications	P
	Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users	Information for safety mentioned in manufacturer's specifications	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		N/A
8.2	Small cell and battery safety information	Not small battery	N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A
9	MARKING		P
9.1	Cell marking	The final product is battery.	N/A
	Cells are marked as specified in IEC 61960, except coin cells		N/A
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
9.2	Battery marking		P
	Batteries are marked as specified in IEC 61960, except for coin batteries	The battery is marked in accordance with IEC 61960-3, also see page 5.	P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity	Not coin batteries.	N/A
	Batteries are marked with an appropriate caution statement		P
	- Terminals have clear polarity marking on the external surface of the battery, or		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections	The design of the external connector prevents reverse polarity connections.	P
9.3	Caution for ingestion of small cells and batteries	Not coin cells and batteries	N/A
	Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package		N/A
9.4	Other information		P
	The following information are marked on or supplied with the battery:		P
	- Storage and disposal instructions	Information for storage and disposal instructions mentioned in manufacturer's specifications.	P
	- Recommended charging instructions	Information for recommended charging instructions mentioned in manufacturer's specifications.	P
10	PACKAGING AND TRANSPORT		N/A
	Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cells	N/A
ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		N/A
A.1	General		N/A
A.2	Safety of lithium ion secondary battery		N/A
A.3	Consideration on charging voltage		N/A
A.3.1	General		N/A
A.3.2	Upper limit charging voltage		N/A
A.3.2.1	General		N/A
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		N/A
A.4	Consideration of temperature and charging current		N/A
A.4.1	General		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.2	Recommended temperature range		N/A
A.4.2.1	General		N/A
A.4.2.2	Safety consideration when a different recommended temperature range is applied		N/A
A.4.3	High temperature range		N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		N/A
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range		N/A
A.4.4.1	General		N/A
A.4.4.2	Explanation of safety viewpoint		N/A
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		N/A
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N/A
A.4.5	Scope of the application of charging current		N/A
A.4.6	Consideration of discharge		N/A
A.4.6.1	General		N/A
A.4.6.2	Final discharge voltage and explanation of safety viewpoint		N/A
A.4.6.3	Discharge current and temperature range		N/A
A.4.6.4	Scope of application of the discharging current		N/A
A.5	Sample preparation		N/A
A.5.1	General		N/A
A.5.2	Insertion procedure for nickel particle to generate internal short		N/A
A.5.3	Disassembly of charged cell		N/A
A.5.4	Shape of nickel particle		N/A
A.5.5	Insertion of nickel particle in cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle in winding core		N/A
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N/A
A.5.6	Insertion of nickel particle in prismatic cell		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.6	Experimental procedure of the forced internal short-circuit test		N/A
A.6.1	Material and tools for preparation of nickel particle		N/A
A.6.2	Example of a nickel particle preparation procedure		N/A
A.6.3	Positioning (or placement) of a nickel particle		N/A
A.6.4	Damaged separator precaution		N/A
A.6.5	Caution for rewinding separator and electrode		N/A
A.6.6	Insulation film for preventing short-circuit		N/A
A.6.7	Caution when disassembling a cell		N/A
A.6.8	Protective equipment for safety		N/A
A.6.9	Caution in the case of fire during disassembling		N/A
A.6.10	Caution for the disassembling process and pressing the electrode core		N/A
A.6.11	Recommended specifications for the pressing device		N/A
ANNEX B	RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS		N/A
ANNEX C	RECOMMENDATIONS TO THE END-USERS		N/A
ANNEX D	MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS		N/A
D.1	General		N/A
D.2	Method		N/A
	A sample size of three coin cells is required for this measurement	(See appended table D.2)	N/A
	Coin cells with an internal resistance greater than 3 Ω require no further testing		N/A
	Coin cells with an internal resistance less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N/A
ANNEX E	PACKAGING AND TRANSPORT		N/A
ANNEX F	COMPONENT STANDARDS REFERENCES		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.2.1	TABLE: Continuous charging at constant voltage (cells)				N/A
Sample No.	Recommended charging voltage V _c (Vdc)	Recommended charging current I _{rec} (A)	OCV before test (Vdc)	Results	
Supplementary information:					

7.3.1	TABLE: External short circuit (cell)					N/A
Sample No.	Ambient (°C)	OCV at start of test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT, (°C)	Results	
Samples charged at charging temperature upper limit						
Samples charged at charging temperature lower limit						
Supplementary information:						

IEC 62133-2						
Clause	Requirement + Test				Result - Remark	Verdict
7.3.2	TABLE: External short circuit (battery)					P
Sample No.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT , (°C)	Component single fault condition	Results
A003619708-004	20.8	46.94	82.1	20.9	MOSFET U33 (2-3) SC	P
A003619708-005	20.5	46.87	83.7	20.8	MOSFET Q23 (S-D) SC	P
A003619708-006	21.9	46.98	79.3	22.6	MOSFET T5 (S-D) SC	P
A003619708-007	21.6	46.89	82.6	21.8	--	P
A003619708-008	20.5	46.95	81.9	20.8	--	P
Supplementary information:						
- No fire or explosion						
Remark: SC=short circuit.						

7.3.5	TABLE: Crush (cells)				N/A
Sample No.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
Samples charged at charging temperature upper limit					
Samples charged at charging temperature lower limit					
Supplementary information:					

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.6	TABLE: Over-charging of battery			P
Constant charging current (A)	100			—
Supply voltage (Vdc)	63.84			—
Sample No.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results
A003619708-012	42.32	945	21.9	P
A003619708-013	42.69	507	21.8	P
A003619708-014	40.98	819	21.2	P
A003619708-015	43.32	92	22.1	P
A003619708-016	41.32	78	21.6	P
Supplementary information: - No fire or explosion				

7.3.7	TABLE: Forced discharge (cells)			N/A
Sample No.	OCV before application of reverse charge (Vdc)	Measured reverse charge I_r (A)	Lower limit discharge voltage (Vdc)	Results
Supplementary information:				

7.3.8.1	TABLE: Vibration				P
Sample No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results
A003619708-017	46.86	46.84	19814	19811	P
A003619708-018	46.91	46.90	19894	19890	P
A003619708-019	46.87	46.88	19916	19913	P
A003619708-029*	46.83	46.79	17756	17754	P
A003619708-030*	46.86	46.83	17732	17731	P
A003619708-031*	46.90	46.88	17716	17712	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

- No fire or explosion
- No rupture
- No leakage
- No venting

Remark: * test with sample P2500.

7.3.8.2	TABLE: Mechanical shock					P
Sample No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
A003619708-020	46.92	46.91	19914	19912	P	
A003619708-021	46.86	46.86	19933	19929	P	
A003619708-022	46.89	46.88	19867	19865	P	
A003619708-029*	46.98	46.97	17761	17759	P	
A003619708-030*	46.85	46.84	17739	17736	P	
A003619708-031*	46.87	46.86	17712	17710	P	

Supplementary information:

- No fire or explosion
- No rupture
- No leakage
- No venting

Remark: * test with sample P2500.

7.3.9	TABLE: Forced internal short circuit (cells)					N/A
Sample No.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results	
Samples charged at charging temperature upper limit						
Samples charged at charging temperature lower limit						

IEC 62133-2					
Clause	Requirement + Test			Result - Remark	Verdict
Supplementary information: 1) Identify one of the following: 1: Nickel particle inserted between positive and negative (active material) coated area. 2: Nickel particle inserted between positive aluminium foil and negative active material coated area.					

D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾	
Supplementary information: 1) Coin cells with an internal resistance less than or equal to 3 Ω, see test result on corresponding tables according to Clause 6 and Table 1.					

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Cell	Hunan Times New Energy Technology Co., Ltd.	FP13D6263	3.2V, 50Ah	IEC 62133-2:2017, IEC 62133-2:2017/AM D1:2021	TÜV Rheinland CB certificate No.: JPTUV-142861
PCB	Jiangxi Yongzhao Electronics Co Ltd	CHT-3	V-0, 130°C	UL 796 UL 94	UL E336650
PCB (Alternative)	Interchangeable	Interchangeable	V-0, 130°C	UL 796 UL 94	UL approved
IC (U4)	sinowealth	SH367309	Overcharge detection voltage: 3.70V(per cell); 51.8V(Battery)Over discharge detection: 2.8V(cell); 39.2(battery) Topr: -40°C to 85°C	--	Tested with appliance
IC (U8)	SG Micro Corp	SGM809	Vcc: -0.3V to 6V Ta: -40°C to 125°C	--	Tested with appliance
IC (U9)	Nations	N32G031C8L7	VDD: 1.8 to 5.5 V, Operating temperature range: -40 to 105 °C	--	Tested with appliance
Optocoupler (U5, U24)	EVELIGHT	EL817	Ic: 50mA, If: 60mA, Topr: -55 to 110 °C	IEC 60747-17	VDE 132249
MOSFET (U1, U2, U3, U14, U15, U16, U27, U28, U33, U34, U35, U36)	China Resources Microelectronics (Chongqing) Limited	CRSS042N10N	V _{DS} : 100V, V _{GS} : ±20V, I _D : 120A, T _J , T _{STG} : -55°C to 150°C	--	Tested with appliance
MOSFET (Q23, T5)	Techcode Semiconductor Limited	TDM31090E	V _{DS} : 100V, V _{GS} : ±20V, I _D : 79A, T _J , T _{STG} : -55°C to 150°C	--	Tested with appliance
FUSE (R149, R152, R163)	Dongguan TLC Electronic Technology Co., Ltd.	WSFD4550	Voltage Rating: 80V, Current Rating: 45A, Operating Voltage: 43.7 V~62.0V, Topr: -25°C to 85°C	EN 60127-1:2006+A1+A2 EN 60127-4:2005+A1+A2	TÜV RH Certif. No.: J50619249 0001

IEC 62133-2					
Clause	Requirement + Test			Result - Remark	Verdict
NTC (NTC1, NTC2)	NANJING SHIHENG ELECTRONICS CO LTD	MF52C 103Y3435	R _{25°C} : 10KΩ±1%, B _{25°C/85°C} : 3435K, T _{moa} : 200°C	UL 1434	UL E240991
Lead wire (BMS broad connect to batteries)	DONGGUAN ZHONGZHEN ENERGY TECHNOLOGY CO.,LTD	3512	8AWG, 600V, 200°C	UL 758	UL E355578
Lead wires (connected from BMS to battery) (Alternative)	Interchangeable	Interchangeable	8AWG minimum, 600V, 200°C or better	UL 758	UL approved
Inlet/outlet Connector	DONGGUAN ONEWIRE HARNESS NEWENERGY TECHNOLOGY CO.,LTD	LS032-0206F004	Rated voltage: 500V DC, Rated current: 120A, Operating temp range: -40 to 65°C	EN 61984:2009	TÜV RH Certif. No.: J50581142 0001
Plastic Enclosure	SABIC JAPAN L L C	C7410	PC/ABS, V-0, 85°C, 0.8mm thickness	UL 746C UL 94	UL E207780
Plastic Enclosure (Alternative)	Interchangeable	Interchangeable	PC/ABS, V-0, min.0.8mm thickness, min. 85°C	UL 746C UL 94	UL approved
Metal enclosure	Dongguan zhenghongxin electromechanical equipment Co.LTD	SPCC	min. thick 1.5mm, SPCC	--	--
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					


ATTACHMENT to IEC62133_2C			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT IEC 62133-2 (Republic of Korea) NATIONAL DIFFERENCES (Secondary cells and batteries containing alkaline or other non-acid electrolytes - Safety requirements for portable sealed secondary lithium cells, and for batteries made from them, for use in portable applications - Part 2: Lithium systems)			
Differences according to : National standard KC62133-2(2020-07)			
TRF template used:..... : IECEE OD-2020-F3:2022, Ed. 1.2			
Attachment Form No. : KR_ND_IEC62133_2C			
Attachment Originator : KTR			
Master Attachment..... : 2023-08-02			
Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		P
7.3.6	Over-charging of battery		P
(Revision)	<p>[Add the bolded text]</p> <p>b) Test</p> <p>The test shall be carried out in an ambient temperature of 20 °C ± 5 °C. Each test battery shall be discharged at a constant current of 0,2 k A, to a final discharge voltage specified by the manufacturer. Sample batteries shall then be charged at a constant current of 2,0 k A, using a supply voltage which is:</p> <ul style="list-style-type: none"> • 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or • 1,2 times the upper limit charging voltage presented in Table A.1 per cell for series connected multi-cell batteries, and • sufficient to maintain a current of 2,0 k A throughout the duration of the test or until the supply voltage is reached. <p><u>• In case the charging voltage specified by the manufacturer is higher than the overcharge test voltage, the maximum charging voltage specified by manufacturer should be applied with 2.0 k A₂</u></p> <p>(e.g., quick charging power bank, etc.)</p>	See appended Table 7.3.6 of test report.	P

ATTACHMENT to IEC62133_2C			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>[Replace to the following statement]</p> <p>c) Acceptance criteria</p> <p>Filling beyond the manufacturer's specified limits should not result in ignition or explosion</p>	No ignition. No explosion	P
Annex G	Definition for shape and materials of outer case for cell		—
<i>(Addition)</i>	<p>G.1 General</p> <p>Annex G provides definitions for shape and materials of outer case for cell</p> <p>G.2 Shape of outer case for cell</p> <p>G 2.1 Cylindrical cell</p> <p>Cell with a cylindrical shape in which the overall height is equal to or greater than diameter.</p> <p>G 2.2 Prismatic cell</p> <p>Cell having the shape of a parallelepiped whose faces are rectangular</p> <p>G.3 Materials of outer case for cell</p> <p>G.3.1 Soft case</p> <p>Non-metallic outer case or container for cell</p> <p>G.3.2 Hard case</p> <p>Metallic outer case or container for cell.</p>	<p>(Shape of outer cases)</p> <p><input type="checkbox"/> Cylindrical</p> <p><input checked="" type="checkbox"/> Prismatic</p> <p>(Materials of outer cases)</p> <p><input type="checkbox"/> Hard</p> <p><input checked="" type="checkbox"/> Soft</p>	—
Annex H	Calculation method of the volumetric energy density for cell		—
<i>(Addition)</i>	<p>Annex H provide a calculation method of the volumetric energy density for cell in use of smart phone, tablet, notebook.</p> <p>H.1 General</p> <p>Unless otherwise stated in the Annex E, the dimensions for calculation are based on these for cell before shipment and the volumetric energy density shall be calculated with a maximum values specified by manufacturer. If the specification for cell can't be provided a dimension for calculation, the manufacturer's other documentation shall be provided to demonstrate compliance for its calculation.</p>	331.4Wh / L	—


ATTACHMENT to IEC62133_2C			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>H.2 Calculation Method</p> <p>L : Length (max.) of cell (including terrace) W : Width (max.) of cell T : Thickness (max.) when shipping charge (For reference, Please Exclude the dimension of any tape that is attached to cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{\text{Length (L)} \times \text{Width (W)} \times \text{Thickness (T)}}$ <p>[H.1 – Prismatic cell using soft case]</p> <p>L : Length (max.) of cell W : Width (max.) of cell T : Thickness when shipping charge (For reference, Please Exclude the dimension of any tape that is attached to cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{\text{Length (L)} \times \text{Width (W)} \times \text{Thickness (T)}}$ <p>[H.2 – Prismatic cell using hard case]</p> <p>D : Diameter (max.) of cell L : Length (max.) of cell (According to shape of cell at shipping, The dimension of tube for cell may be included In overall dimension of cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{3.14159 \times \frac{\text{Diameter (D)}^2}{4} \times \text{Length(L)}}$ <p>[H.3 – Cylindrical cell using hard case]</p>		

Product: Li-ion battery

Type Designation: B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS

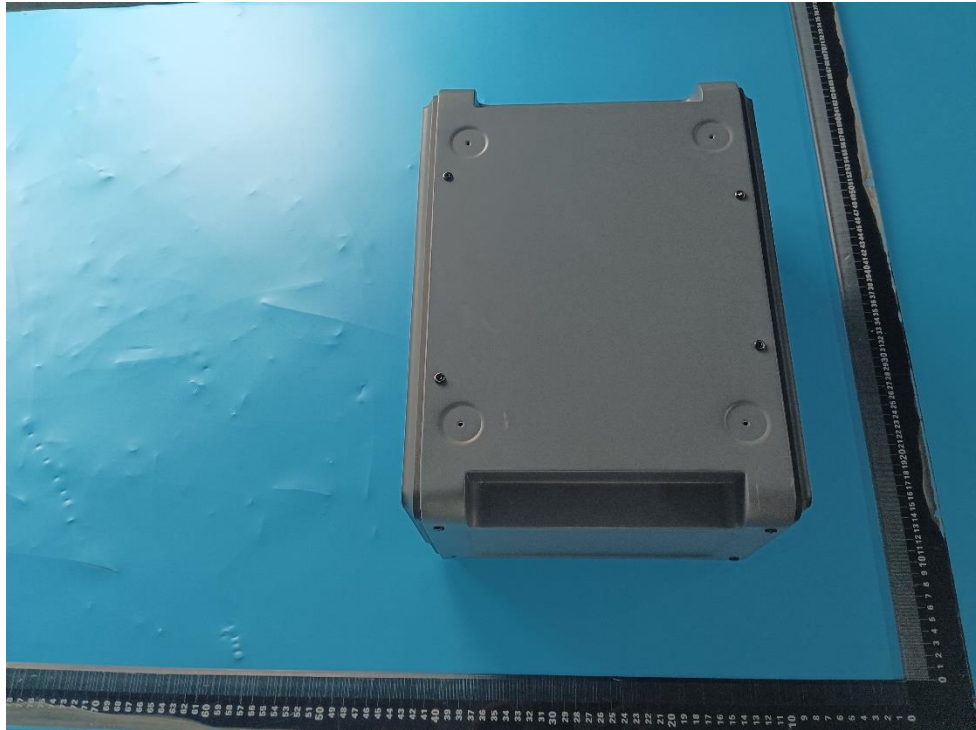

Picture 1. External View of B2200

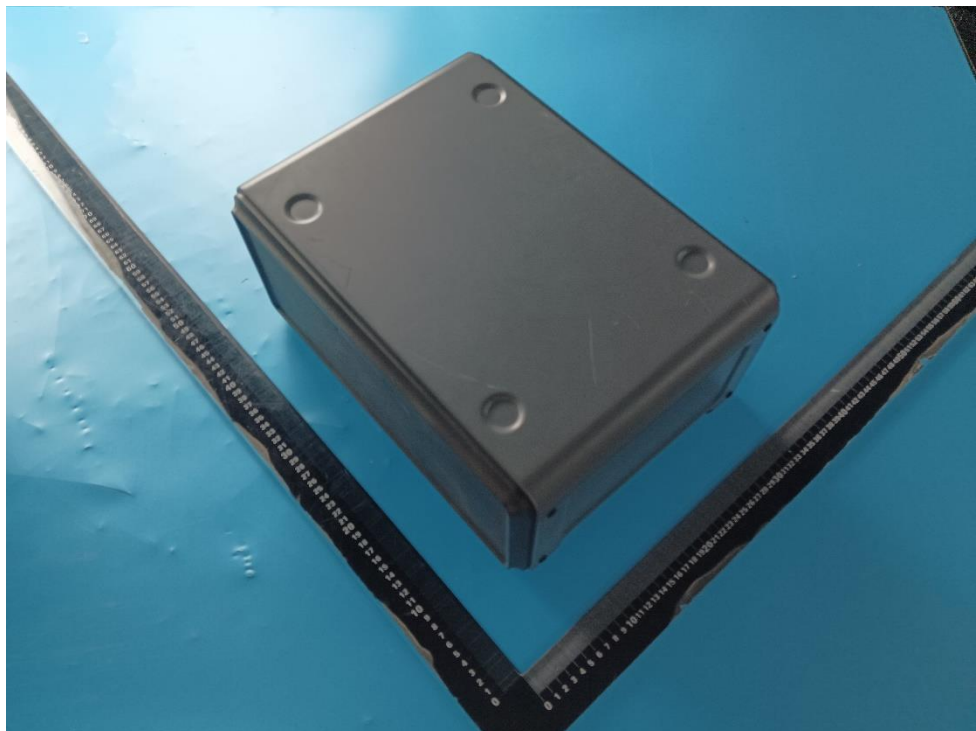

Picture 2. External View of B2200

Product: Li-ion battery

Type Designation: B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS




Picture 3. External View of B2200




Picture 4. Connector View of B2200

Product: Li-ion battery

Type Designation: B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS

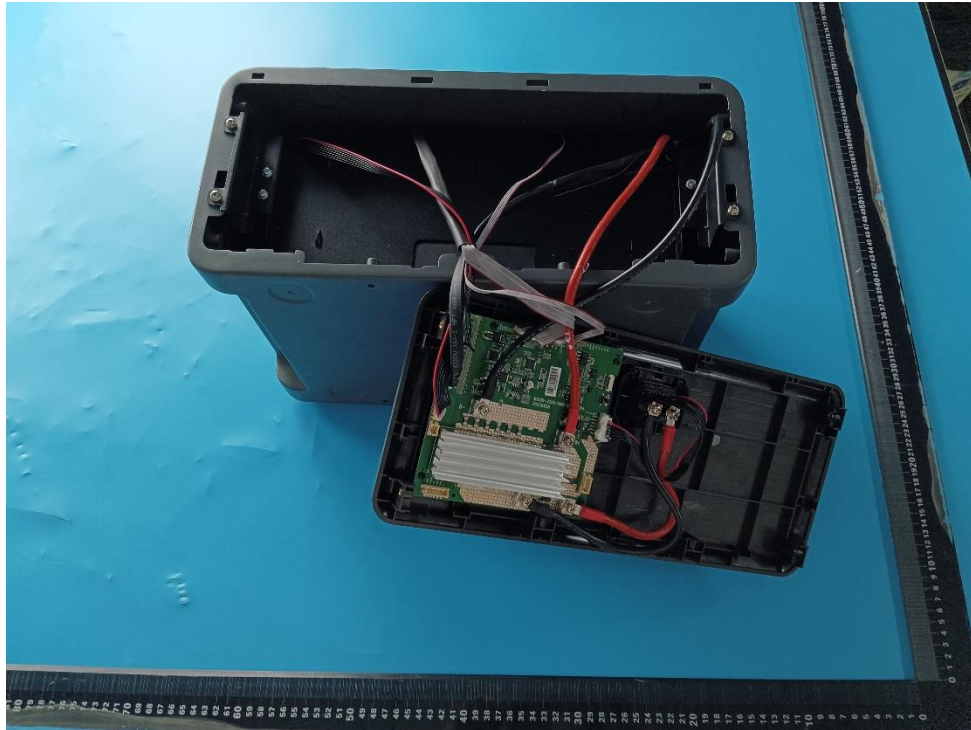


Picture 5. Inner view 1 of B2200

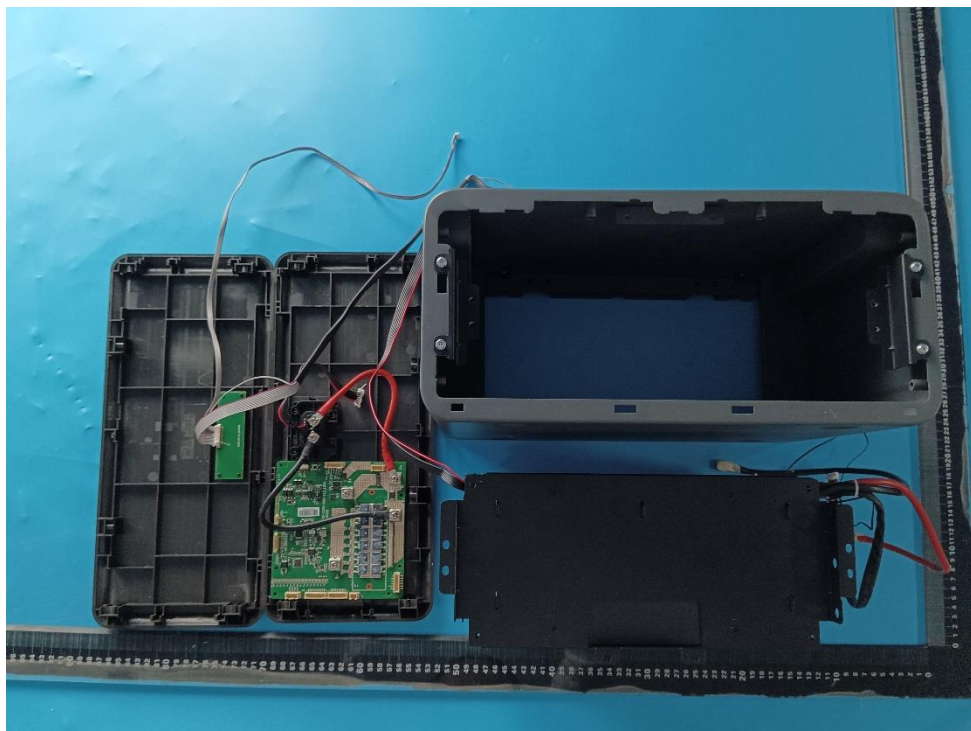

Picture 6. Inner view 2 of B2200

Product: Li-ion battery

Type Designation: B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS

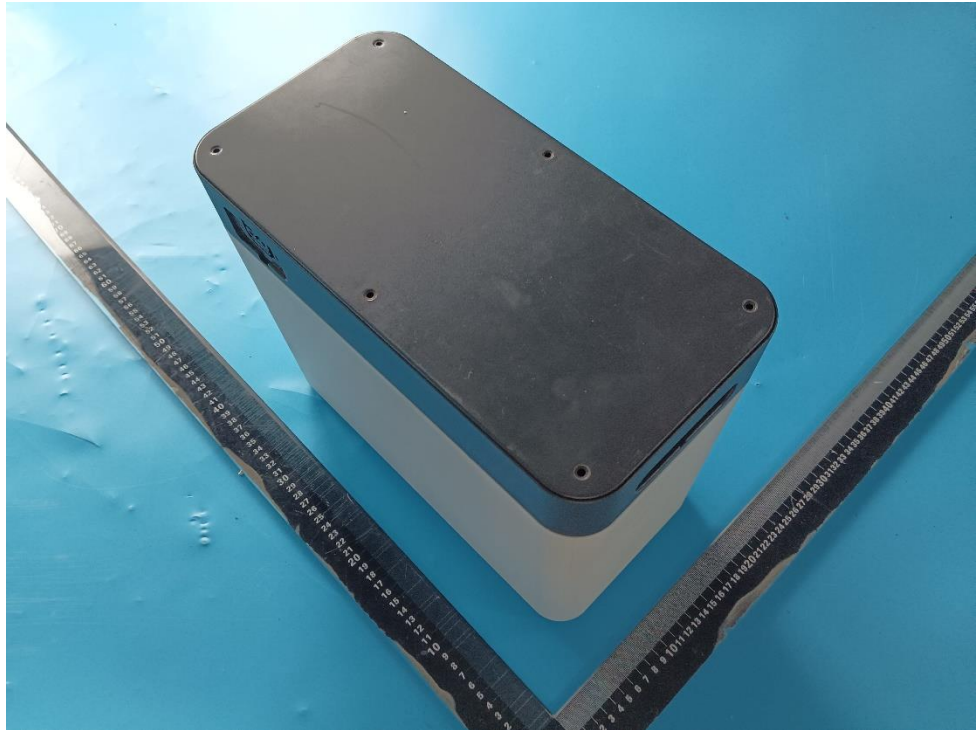

Picture 7. External View of P2500



Picture 8. External View of P2500

Product: Li-ion battery
Type Designation: B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS



Picture 9. Connector View of P2500




Picture 10. Inner view 1 of P2500

Product: Li-ion battery

Type Designation: B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS




Picture 11. Inner view 2 of P2500

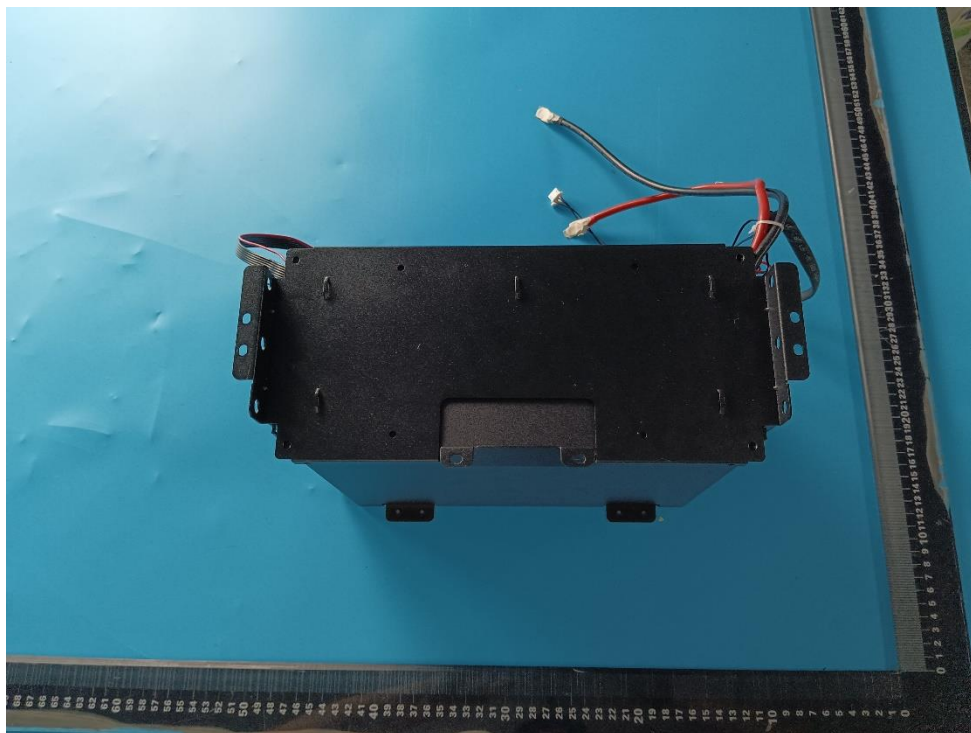


Picture 12. Inner battery view 1

Product: Li-ion battery

Type Designation: B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS

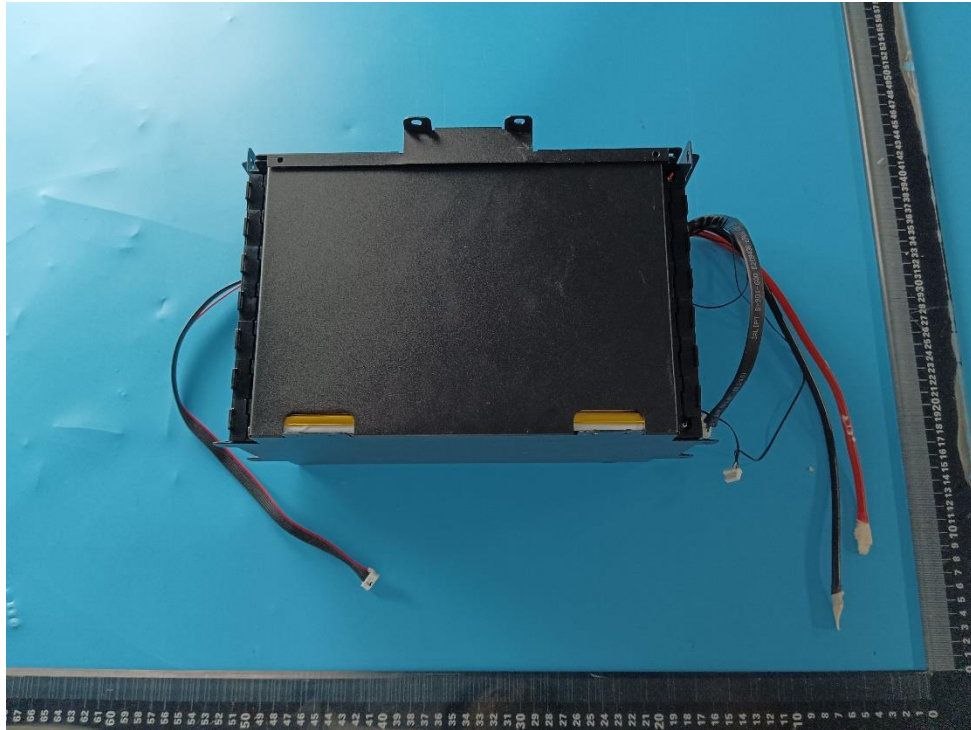


Picture 13. Inner battery view 2

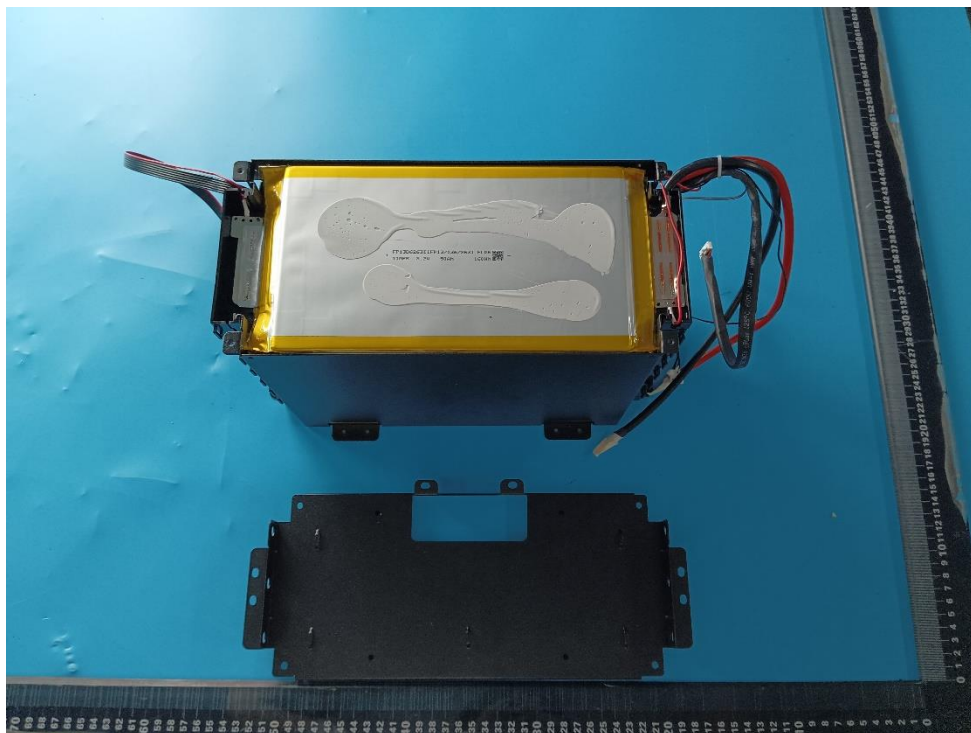


Picture 14. View of the component cell

Product: Li-ion battery

Type Designation: B2200, P2500, P2500H, P2500-D, P2500-K, 10183, BPP2500, BC-P2500, 10174, HEMERA-PLUS

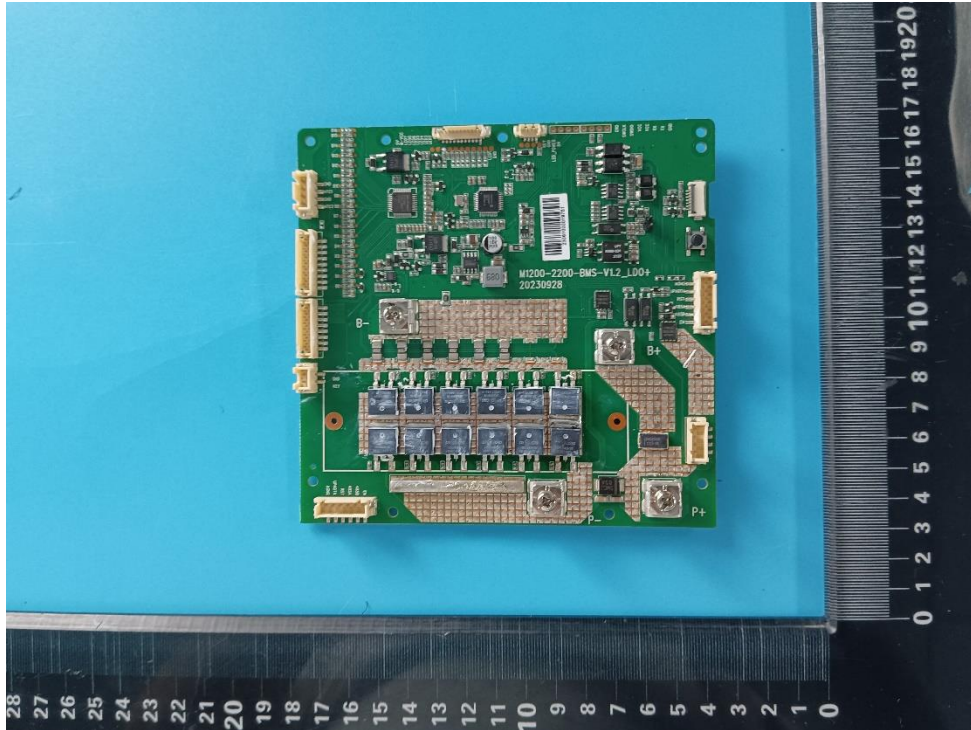

Picture 15. Front view of PCM

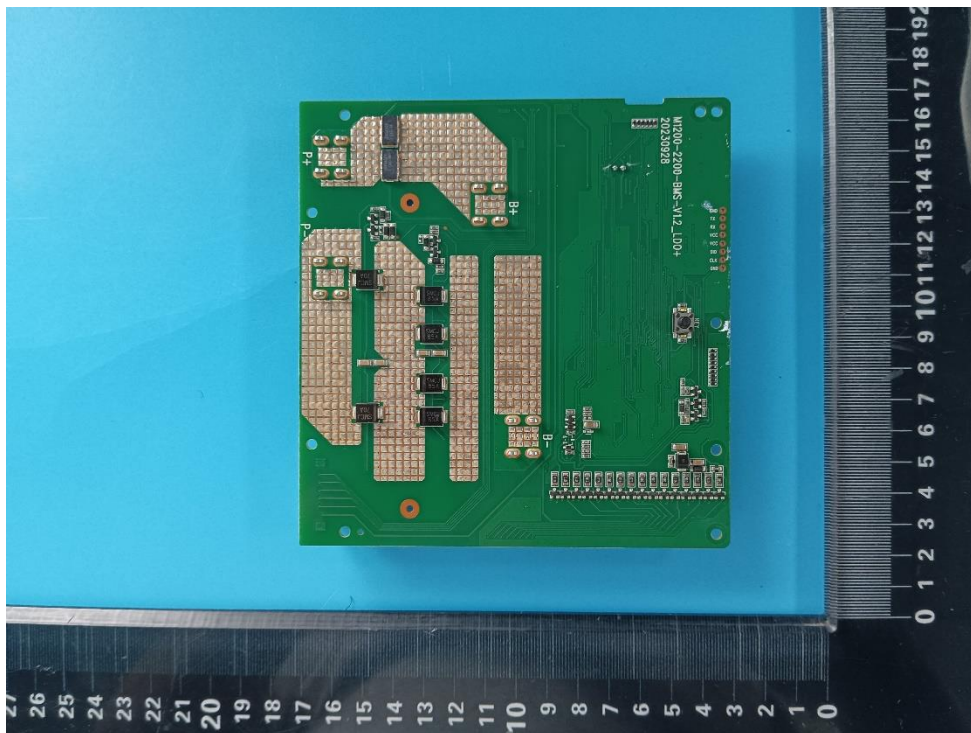

Picture 16. Back view of PCM